30" Under Cabinet Hood

UXT5230AY

Key Features

- Convertible Under Cabinet Hood **(New Design)**
- Exhausts up to 350 CFM with a 3 1/4" x 10" Rectangular or 7" Round Duct
- Axial Fan
- 3-Speed, Push-Button Control
- Dual Halogen Lighting **(Bulbs Included)**
- Dishwasher Safe, Aluminum Mesh Filters

30" Under Cabinet Hood

UXT5230AY

Specifications

MODEL NO.	UXT5230AY
Type	Convertible
DUCT TYPE	
Round 7"	Yes
Rectangular 3 1/4" x 10"	Yes
Washable Grease Filter	Yes
VERTICAL CFM	
7" Round	364
3 1/4" x 10" Rectangular	324
HORIZONTAL CFM	
3 1/4" x 10"	327
VERTICAL SONES	
7" Round	7.7
3 1/4" x 10" Rectangular	7.5
GENERAL INFORMATION	
Horizontal Sones	7
Control	3-Speed, Push Button
Damper	3 1/4" x 10" (Included) 7" Optional
Blower	Axial Fan
Lighting	Dual Halogen (Bulbs Included)
Title 24 Compliant	Yes
Range/Cooktop Compatibility	Up to 50K BTU
Approx. Shipping Weight (lbs.)	22
OPTIONAL ACCESSORIES	
7" Round Damper	W10355451
7" Round Adapter/Vent Connector	W10388168
Power Cord	W10355452
Convertible to Non-Vented Mode (Recirculation Kit)	W10386873
COLOR AVAILABILITY	**W,B,S**

* W-White, B-Black, S-Stainless Steel

Installation Requirements

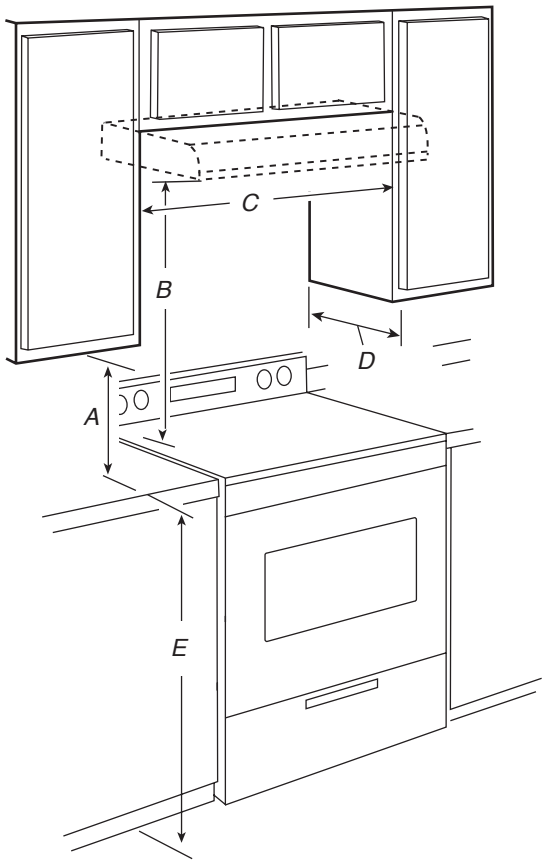

A. 18" (45.7 cm) min. clearance - upper cabinet to countertop
B. 24" (61.0 cm) to 30" (76.2 cm) suggested max. - bottom of range hood to cooking surface
C. 30" (76.2 cm) min. cabinet opening width for 30" (76.2 cm) models and 36" (91.4 cm) min. cabinet width for 36" (91.4 cm) models.
D. 13" (33.0 cm) cabinet depth
E. 36" (91.4 cm) base cabinet height

Dimensions

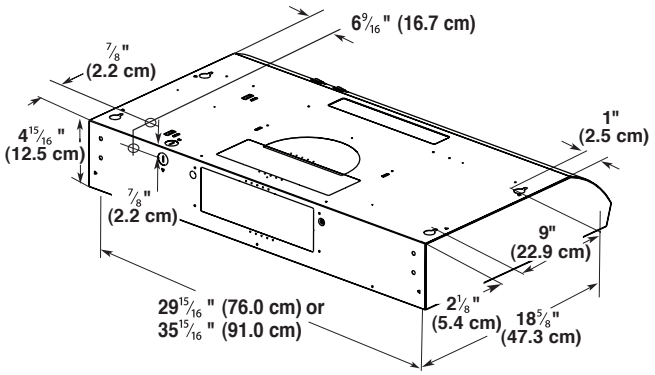

Dimensions are for planning purposes only.
For complete details, see Installation Instructions packed with product.
Specifications subject to change without notice.

®Registered trademark/™ Trademark of Whirlpool, U.S.A. ©2011. All rights reserved.